




Acoustic cabinet fans

CAB Series

CAB-150 *230V 50/60* VE



Acoustic cabinet fans manufactured from heavy gauge galvanised steel sheet and internally lined with 50 mm thickness of fireproof acoustic insulation (M0). Fan cover supplied with "quick-fix" fixings to enable fast removal and fitting, and a tight close. All models incorporate single phase direct-drive forward curved centrifugal fan. All fans installed in acoustic cabinet fans CAB comply with the efficiency requirements of the ErP Directive. All cabinets can be installed outdoors as standard. Available, depending upon the model, with single motors in 2 or 4 poles.

Motors

From CAB-125 to 315, all motors are IP44, Class B, with ball bearings and thermal protection.
From CAB-315N to 400, all motors are IP55, Class F, with ball bearings and thermal protection.
Electrical supply:
Single phase 230V-50Hz.

Speed controllable using voltage regulation.

Working temperature from -20°C to +40°C.

+ Attributes




Low noise level
Acoustic insulation of 50 mm thickness fireproof fibreglass (M0) with a high resistance coating reducing the noise level significantly.



Cabinet air tightness
All models incorporate inlet and discharge circular duct connection flanges with integrated rubber air seal.




IP55 remote terminal box
To ease installation and connection to external controls.



Easy maintenance
"Quick fix" fixings to enable a fast and easy maintenance.



Easy to install
All models are supplied with four mounting feet to facilitate any ceiling, wall or floor mounting installation.



Installation in any position
Can be mounted in vertical, horizontal or inverted position.

+ Acoustic characteristics

Unfortunately an error occurred.

+ Technical characteristics


Unfortunately an error occurred.

+ Dimensions

Unfortunately an error occurred.

11

+ Curves

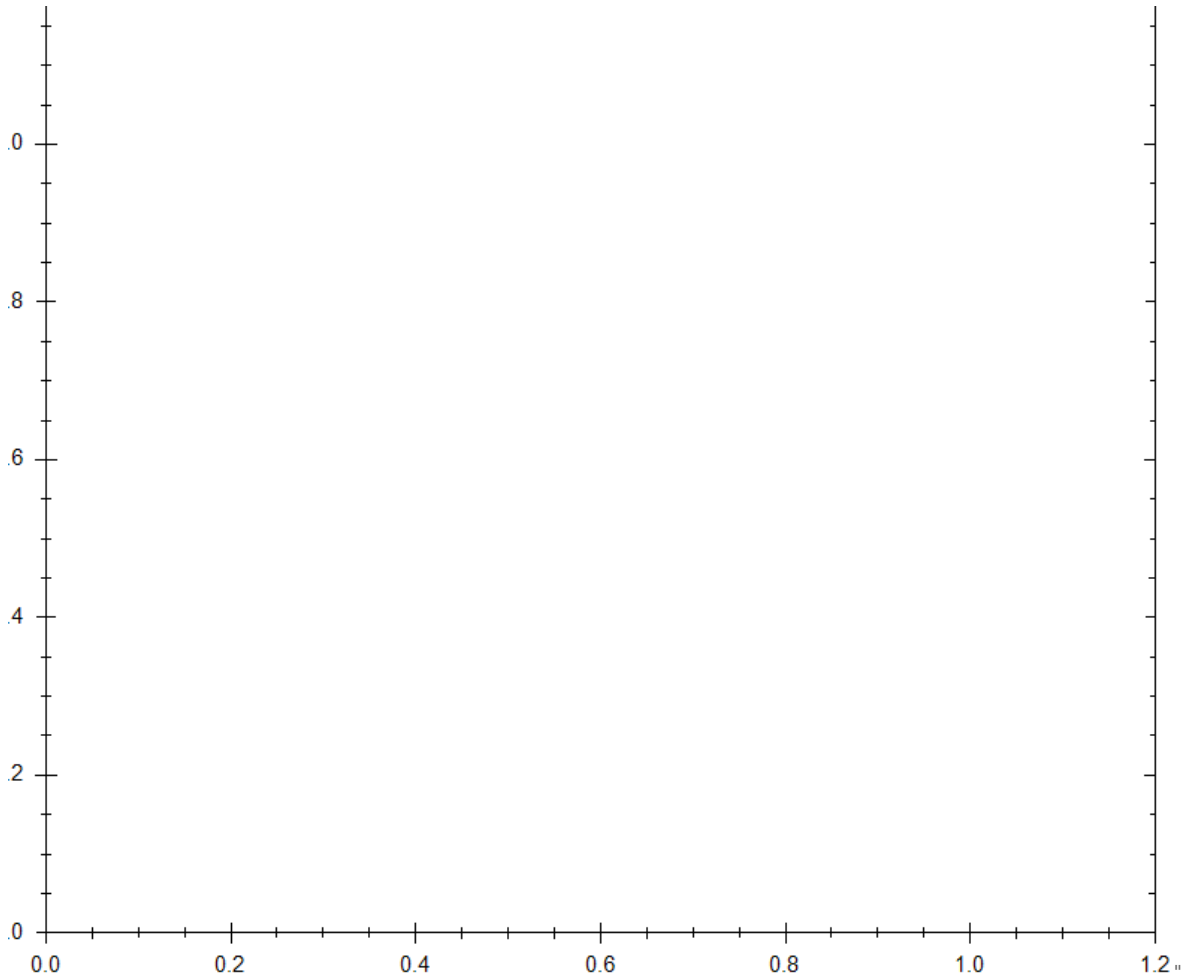

+ Mounting Accessories



MBE
Electric heater.



MBW
Hot water coil.



MFL-G4
Filtration boxes.



SIL
Sound attenuators.



ACOPPEL F400 N
Circular flexible connector.



APC
Discharge protection guards for direct connection to the inlet-outlet flange. (please see pages Mounting Accessories).



KSE-45
Flexible supports
Rubber anti-vibration mounts to reduce vibration and noise transmission to the installation. (1KSE = set of 4 supports per bag).



CAR
Circular back draft shutters.

+ Electrical Accessories



REB-1N / REB-1NE
REB-2,5N /
REB-2,5NE
Electronic, single
phase speed
controllers.



RMB-1,5
Auto transformer
single phase
speed controllers.



ON/OFF
IP55 SWITCH



PULSER
Single phase/three
phase electric
heater controller.



TG-K330
Duct temperature
sensor.
TG-R530
Room temperature
sensor.



TTC-2000
TTC-2000 + TTS-1
Three phase electric
heater controller.
The TTC-2000
needs an external
temperature sensor
to control the
heater (TG-K300 or
TG-R530).