




# CENTRIFUGAL SINGLE INLET FANS

## CRMT Series

CRMT/4-400/165 7,5KW  
(400V50HZ)LG VE

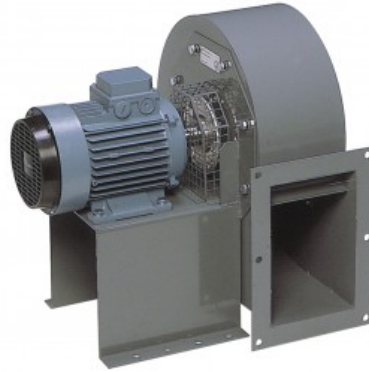

Range of single inlet direct drive centrifugal fans designed for smoke extraction in fire conditions and certified F400-120 (CE marked) and suitable for the continuous extraction of air stream up to 300°C.

All casings are manufactured from electro-welded sheet steel protected against corrosion by grey epoxy-polyester paint coating.

All models incorporate forward curved centrifugal impellers manufactured from galvanised sheet steel.

Available, depending upon the model, with single or three phase motors in 4 or 6 poles.

### Motors

All motors are IP55, class F.

Electrical supply:

-Three phase 230/400V-50Hz up to 3kW.

-Three phase 400V-50Hz, for higher power motors.

(See characteristics chart).

### Additional Information

The scroll can be orientated in 8 different positions as per the table below.

Standard supplied position: LG 270.

### On request

Fan supplied in RD position.

Fan fitted with 2-speed motor.

### + Attributes



#### Standard motor with cooling wheel

Motor heat removal system ensures extraction of high temperature air stream.



#### Impellers dynamically balanced

Forward curved centrifugal impellers dynamically balanced according to ISO 1940 standard, providing vibration free Operation.


## + Acoustic characteristics

Unfortunately an error occurred.

## + Technical characteristics

Unfortunately an error occurred.

## + Orientation

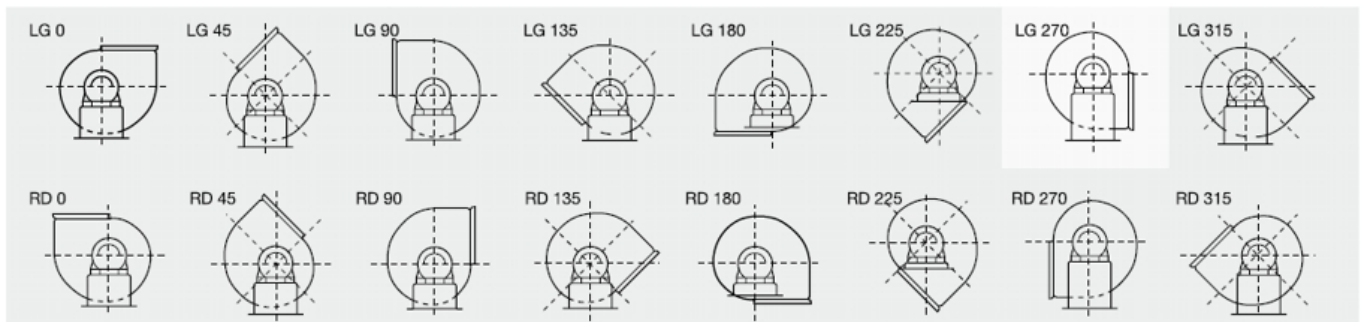


Standard position: LG 270. Special versions are supplied under request.

## + Dimensions


Unfortunately an error occurred.

11


## + Curves

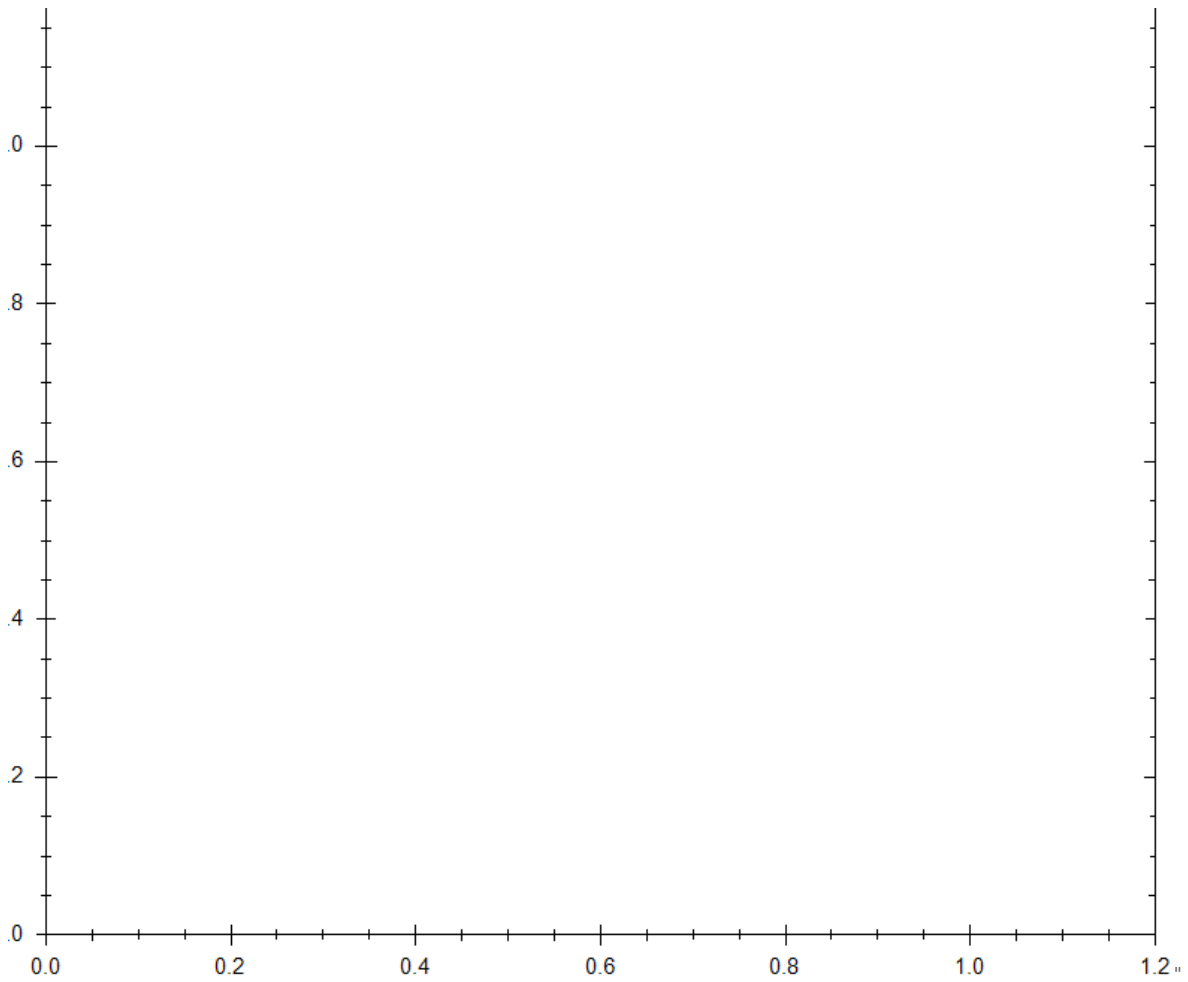


## + Mounting Accessories



**KRJ**  
Inlet guard.



**KBA**  
Inlet mounting  
flange.



**KBD**  
Discharge  
mounting flange.



**ACOPEL F400 N**  
Circular flexible  
connector.  
Certified F400-120.



**KAD F400**  
Rectangular flexible  
connector.  
Certified F400-120.