



Single inlet centrifugal fans

BSP Series

BSP 315



Range of belt driven single inlet centrifugal fans, designed for emergency fire smoke extraction in fire conditions and certified F400-120. The fans are also suitable for supply or exhaust applications in commercial and industrial buildings. Sizes of this series are in accordance with AMCA standard 99-0098-76 and DIN323R20.

Operating limit

Each fan type has its maximum operating speed and power due to its mechanical design. The operating limit of BSP series is adjusted to meet the requirement of class I limit as defined in AMCA standard 99-2408-69.

Motor

Foot-mounted motor (B3), IP55, Class F insulation

Electrical supplies:

Three phase 230/400V-50Hz up to 3kW.

Three phase 400V-50Hz for higher power motors.

1 speed motor are speed controllable.

Wheel

The wheel of BSP series has backward curved blades manufactured in cold rolled sheet steel with polyester powder coating finish.

Housing

For all sizes except 1250 and above, the housing is manufactured in galvanized sheet steel with the housing fixed to the side plates in "pittsburg lock" form system.

Housing for 1250 and 1400 are manufactured in mild steel finished with polyester powder coating.

Frame

The frame is manufactured with galvanized angular bars for type "C".

For type "T", they are manufactured with sections of steel and finished with polyester powder coating.

Type C (models from 315 to 630)

This type has a frame fitted on both sides of the fan which gives better strength and rigidity. It allows mounting in four different orientations, either CW or CCW rotation.

Type T (models from 710 to 1400)

This type has a welded frame giving increased stiffness and rigidity required for higher operating performance, either CW or CCW rotation.


On request

2 speed motors.

Epoxy paint.

Inspection door and drain hole.

+ Attributes



Assembly type C



Assembly type T


+ Reference

B S P - 8 0 0 - T M - 1 1 k W - 9 0 0 - 9 0 - C C W - 4 0 0 V - 8 8 H z

1 2 3 4 5 6 7 8

- 1 - : Serie.
- 2 - : Impeller diameter (mm).
- 3 - : Fan type.
- 4 - : Motor power (kW).
- 5 - : Fan speed [r.p.m.].
- 6 - : Orientation [°].
- 7 - : Rotation type.
- 8 - : Electrical supply.

+ Orientation

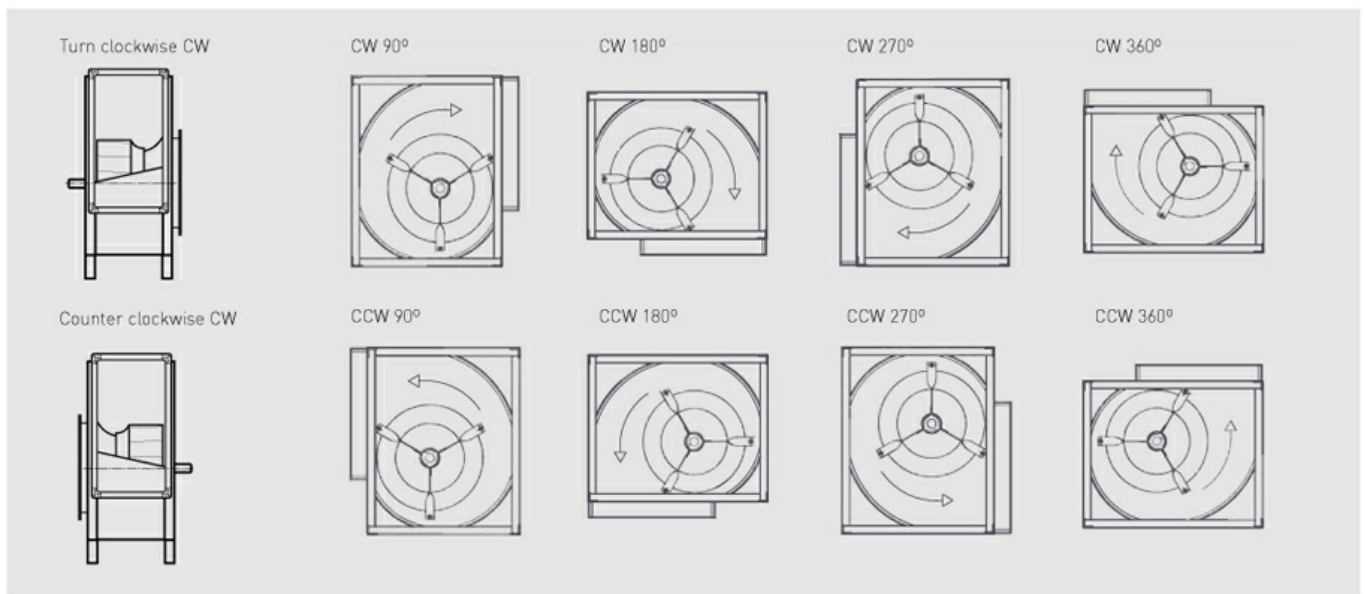


+ Technical characteristics

Before making any electrical connection ensure that the voltage and frequency of the mains electrical supply matches that of the fan data plate label. Explosion proof types only work at an ambient temperature between -30°C and +40°C.

Model	Minimum motor power (kW)	Maximum motor power (kW)	N. min (r.p.m.)	N. max (r.p.m.)	Maximum temperature in continuous operation (°C)	Weight (Kg)
315	0,25	3	1400	3100	85	19
355	0,25	4	1200	2800	85	25
400	0,55	4	1300	2500	85	33
450	0,55	5,5	1000	2200	85	42
500	0,75	5,5	900	1950	85	55
560	0,75	7,5	800	1800	85	76
630	0,75	7,5	700	1500	85	101
710	1,1	11	600	1350	100	189
800	1,1	15	500	1200	100	228
900	1,5	15	500	1050	100	285
1000	3	18,5	500	950	100	338
1120	3	22	400	850	100	575
1250	3	30	350	780	100	769
1400	5,5	45	350	680	100	1048


+ Dimensions

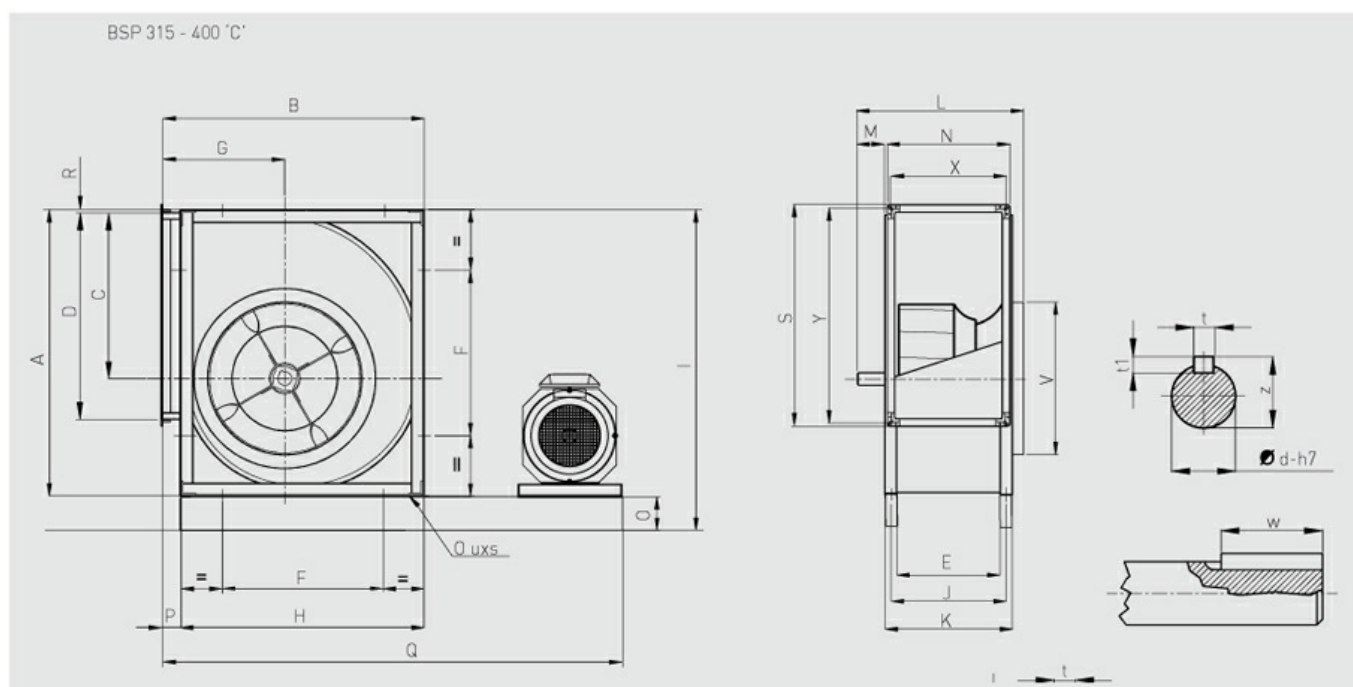


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	V	X	Y	t	t1	w	z	ød	uxs
315	578	518	340	404	223	330	236	480	681	253	283	451	78	279	80	38	1079	3	460	319	251	432	8	7	40	28	25	13x18
355	654	578	383	452	247	368	260	548	754	287	327	479	72	303	80	30	1138	6	508	359	275	480	8	7	40	33	30	13x18
400	736	650	432	506	274	402	290	612	839	314	354	506	72	330	80	38	1244	5	562	404	302	534	8	7	40	33	30	13x18

+ Curve - Example of selection

- Airflow: $q_v = 6660 \text{ m}^3/\text{h}$
 - Outlet velocity: $V = 6.77 \text{ m/s}$
 - Dynamic pressure: $P_d = 27 \text{ Pa}$
 - Total pressure: $p_t = 1250 \text{ Pa}$
 - Fan speed: $N = 1510 \text{ rpm}$
 - Absorbed power: $W = 3.22 \text{ kW}$
 - Total efficiency: $\eta = 71.8 \%$
 - Sound power level: $L_w(A) = 81.3 \text{ dB(A)}$
- Performance shown is for Installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating kW does not include drive losses.
 - The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet $L_{wi}(A)$ sound power levels for installation type B - free inlet, ducted outlet. Ratings do not include the effect of duct end corrections.

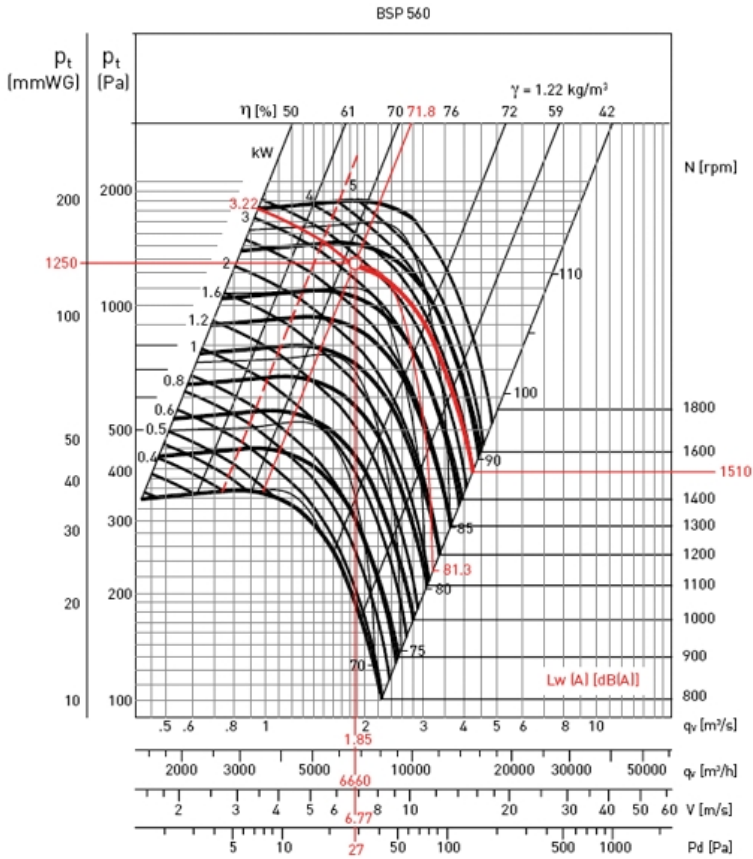


+ Curves

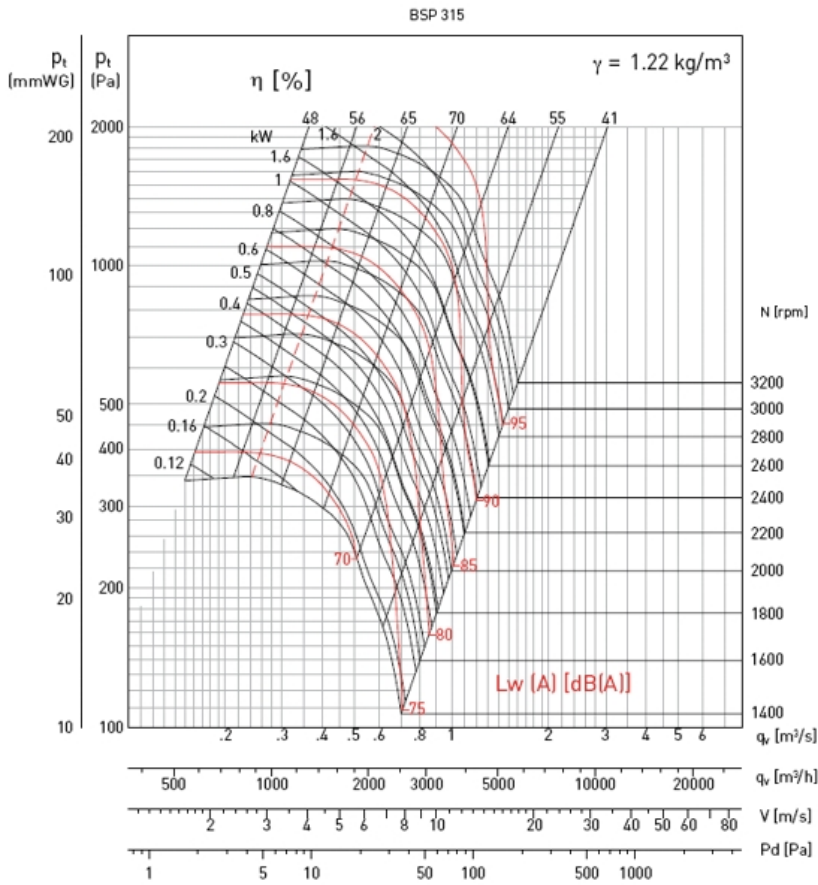

+ Mounting Accessories



ACOPEL F400 N
Circular flexible connector.
Certified F400-120.




PAVZ
Rubber anti-vibration mounts
that absorb vibration and
attenuate the noise produced
in the installation.
(1 PAVZ= 4 supports in a bag).



DEF. DES. FSA/BSB
Rectangular guard for
mounting at
the BSP fan outlet.



DEF. ASP. BDB/FDA
Proof guard for mounting at
the BSP fan inlet.



BRIDA IMP. C/LONA F400 BSB
Rectangular flexible connector for
mounting at the BSP fan outlet.